

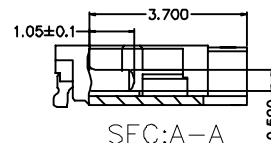




P.C.B. LAYOUT
(TOP VIEW)

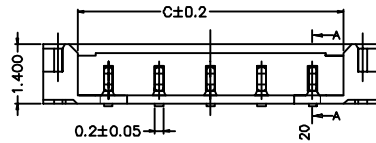

SEC:A-A



MATED CONDITION PCB

SPECIFICATIONS

Current Rating: 1.5A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold-plated
Solder Tabs: Brass/Gold-plated
Material: Nylon 6T,UL94V-0
Color: Black
Qty/reel: 4500pcs

Ordering Information & Dimensions

PIN	A	B	C
2	1.20	4.20	2.65
3	2.40	5.40	3.85
4	3.60	6.60	5.05
5	4.80	7.80	6.25
6	6.00	9.00	7.45
7	7.20	10.20	8.65

UNITS	mm
MAT'L	
FINISH	
Q'TY	PCS
X.± 0.3	X°.± 5°
.X± 0.25	.X°.± 2°
.XX± 0.20	.XX°.± 1°
.XXX± 0.10	.XXX°.± 0.5°

UNITS		mm	
MAT'L			
FINISH			
Q'TY		PCS	
X.± 0.3		X°.± 5°	
.X± 0.25		.X°.± 2°	
.XX± 0.20		.XX°.± 1°	
.XXX± 0.10		.XXX°.± 0.5°	

PART NO.(INTENDED USE)		TITLE:	
A1201WV-S-XP		1.2mm PITCH 180°WAFER-SMT TYPE	
APPD:		DWG NO.:	
CHKD:		A1201WV-S-XP	
DR:		HU 2016.09.25	

SCALE		SHEET	REV.
1/1		1/1	A