
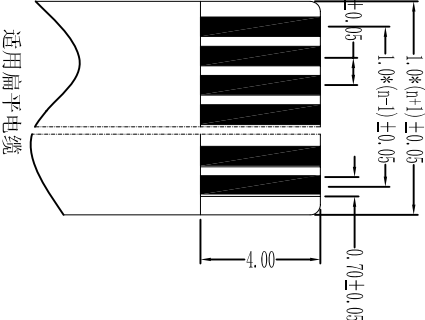
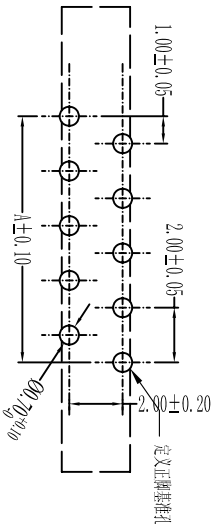
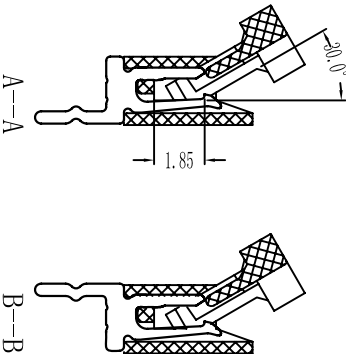

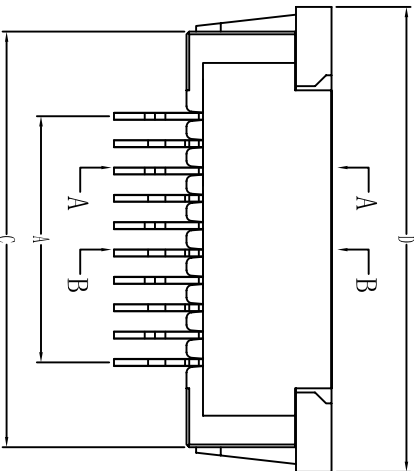



1.0mm PITCH FPC CONNECTORS

性能:

- 额定电流: 0.5A
- 额定电压: 50V
- 耐电压: 500V
- 接触电阻: $\leq 20m\Omega$
- 绝缘电阻: 800M Ω
- 工作温度: -20℃~+85℃
- 塑件 (材质): LCP, UL94V-0
- 镀扣 (材质): LCP, UL94V-0
- 弹簧 (材质): 磷青铜, 镀锡/镀金



孔位	A	B	C	D
2	1	3.15	7.2	9.1
3	2	4.15	8.2	10.1
4	3	5.15	9.2	11.1
5	4	6.15	10.2	12.1
6	5	7.15	11.2	13.1
7	6	8.15	12.2	14.1
8	7	9.15	13.2	15.1
9	8	10.15	14.2	16.1
10	9	11.15	15.2	17.1
11	10	12.15	16.2	18.1
12	11	13.15	17.2	19.1
13	12	14.15	18.2	20.1
14	13	15.15	19.2	21.1
15	14	16.15	20.2	22.1
16	15	17.15	21.2	23.1
17	16	18.15	22.2	24.1
18	17	19.15	23.2	25.1
19	18	20.15	24.2	26.1
20	19	21.15	25.2	27.1
21	20	22.15	26.2	28.1
22	21	23.15	27.2	29.1
23	22	24.15	28.2	30.1
24	23	25.15	29.2	31.1
25	24	26.15	30.2	32.1
26	25	27.15	31.2	33.1
27	26	28.15	32.2	34.1
28	27	29.15	33.2	35.1
29	28	30.15	34.2	36.1
30	29	31.15	35.2	37.1
31	30	32.15	36.2	38.1
32	31	33.15	37.2	39.1
33	32	34.15	38.2	40.1
34	33	35.15	39.2	41.1
35	34	36.15	40.2	42.1

X. ± 0.3		X°. ± 5°	UNITS	mm	NAME (INTENDED USE)	1.0mm FPC (H型) 直插式(正脚)	mstcom	SHEN ZHEN DE RUI ELECTRONIC CO., LTD
X. ± 0.25	X°. ± 2°							
.XX ± 0.20	.XX°. ± 1°	MAT'L	FINISH	PART NO. (INTENDED USE)	1.0K-H-MP	TITLE:	1.0mm FPC (H型) 直插式 (正脚)	DWG NO.:
.XXX ± 0.10	.XXX°. ± 0.5°							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRONIC FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRONIC FACTORY								
Q'TY					SCALE	1/1	SHEET	REV.
APPR:								
CHKD:								
DRC:								
V12.2011.09.28								

mstconn

SHEN ZHEN DE RUI ELECTRONIC CO., LTD

1.0mm FPC (H型) 直插式 (正脚)

100K18-H0H0000000

SCALE

SHEET

REV.

1/1

1/1

A