

PITCH 1.0mm FPC CONNECTOR SMT TYPE

性能:

额定电流: 0.5A

额定电压: 50V

耐电压: 500V

接触电阻： $\leq 20\text{m}\Omega$

绝缘电阻: 800MΩ






工作温度: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$

塑件(材质): LCP, UL94V-0

锁扣(材质): LCP, UL94V-0

插簧(材质): 磷青铜, 镀锡/镀金

焊片(材质): 磷青铜, 镀锡/镀金

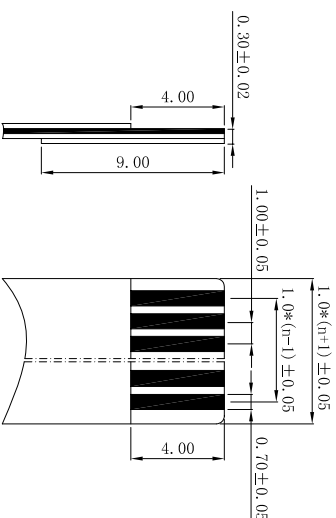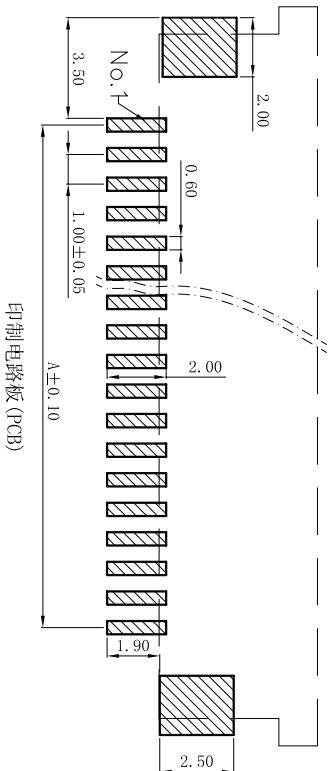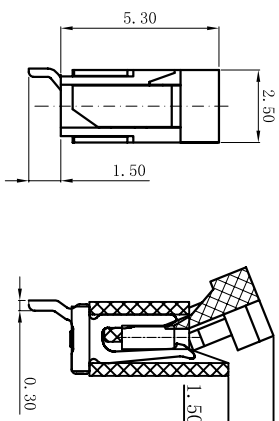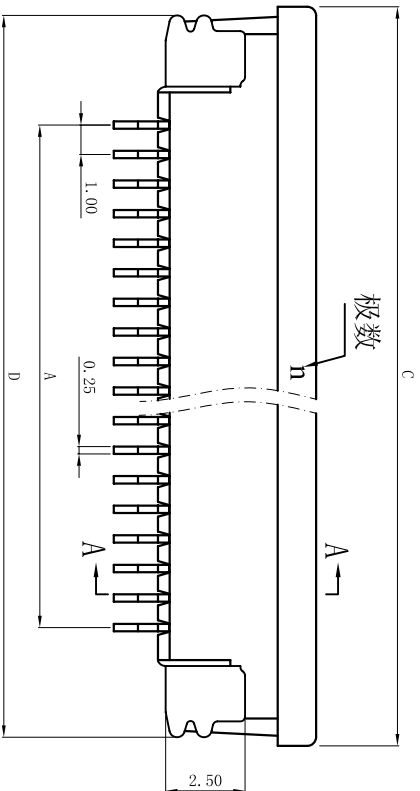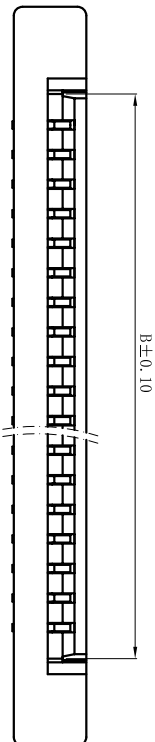

孔位	A	B	C	D
4	3.00	5.15	11.10	10.20
5	4.00	6.15	12.10	11.20
6	5.00	7.15	13.10	12.20
7	6.00	8.15	14.10	13.20
8	7.00	9.15	15.10	14.20
9	8.00	10.15	16.10	15.20
10	9.00	11.15	17.10	16.20
11	10.00	12.15	18.10	17.20
12	11.00	13.15	19.10	18.20
13	12.00	14.15	20.10	19.20
14	13.00	15.15	21.10	20.20
15	14.00	16.15	22.10	21.20
16	15.00	17.15	23.10	22.20
17	16.00	18.15	24.10	23.20
18	17.00	19.15	25.10	24.20
19	18.00	20.15	26.10	25.20
20	19.00	21.15	27.10	26.20
21	20.00	22.15	28.10	27.20
22	21.00	23.15	29.10	28.20
23	22.00	24.15	30.10	29.20
24	23.00	25.15	31.10	30.20
25	24.00	26.15	32.10	31.20
26	25.00	27.15	33.10	32.20
27	26.00	28.15	34.10	33.20
28	27.00	29.15	35.10	34.20
29	28.00	30.15	36.10	35.20
30	29.00	31.15	37.10	36.20
31	30.00	32.15	38.10	37.20
32	31.00	33.15	39.10	38.20
33	32.00	34.15	40.10	39.20
34	33.00	35.15	41.10	40.20
35	34.00	36.15	42.10	41.20
36	35.00	37.15	43.10	42.20

印制电路板(PCB)

适用电缆

$X. \pm 0.3$		UNITS	NAME (INTENDED USE)		mstcomm SHEN ZHEN DE RUI ELECTRONIC CO., LTD		
$X.^{\circ} \pm 5^{\circ}$		mm	1.0mm FPC (E型) 半包上接(H=2.5)				
$.X. \pm 0.25$		MAT'L	PART NO. (INTENDED USE)		TITLE: 1.0mm FPC (E型) 半包上接(H=2.5)		
$.XX \pm 0.20$		$.XX^{\circ} \pm 1^{\circ}$	1.0K-US-mTB				
$.XXX \pm 0.10$		$.XXX^{\circ} \pm 0.5^{\circ}$	FINISH		DWG NO.: 100K12-EXB0000000		
			APPD:				
			CHKD:		SCALE SHEET REV. 1/1 1/1 A		
			Q'TY				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRONIC FACTORY AND SHALL BE RETURNED TO THE FACTORY ON REQUEST. ANY COPIES OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRONIC FACTORY							
DR: YLZ 2011.09.28							