

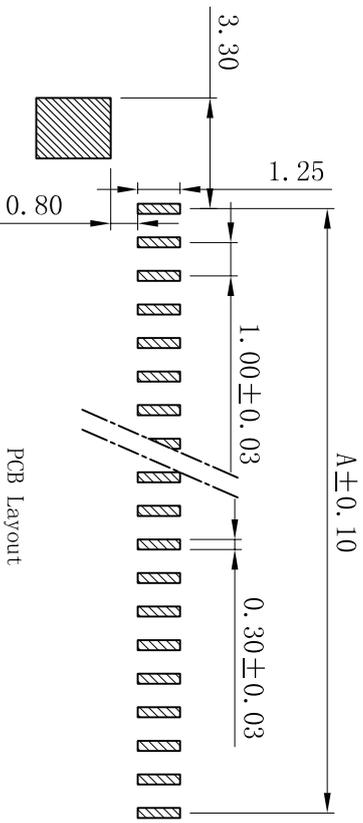
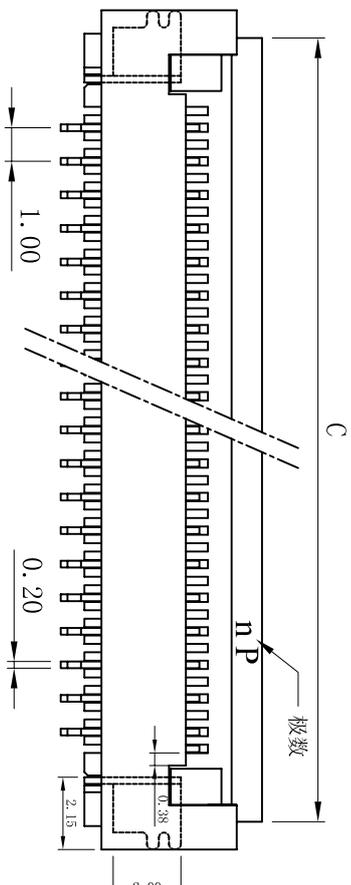
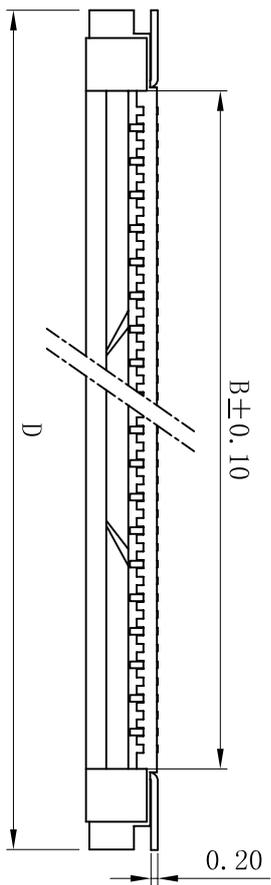
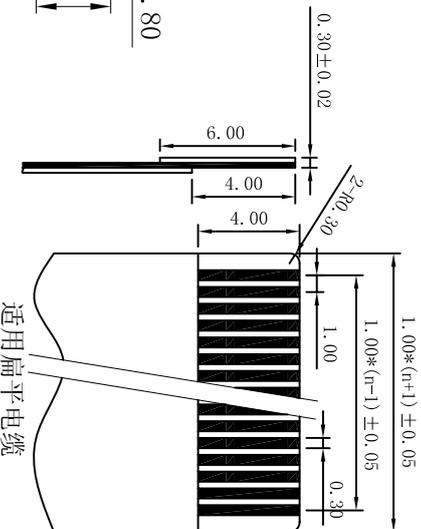


# PITCH 1.00mm FPC CONNECTOR SMT TYPE



性能:  
 额定电流: 0.4A  
 额定电压: 50V  
 耐电压: 200V  
 接触电阻:  $\leq 20m\Omega$   
 绝缘电阻: 500M $\Omega$   
 工作温度: -20°C~+85°C  
 塑件 (材质): LCP本色, UL94V-0  
 锁扣 (材质): LCP黑色, UL94V-0  
 插簧 (材质): 磷青铜, 镀锡/镀金  
 焊片 (材质): 黄铜, 镀锡/镀金

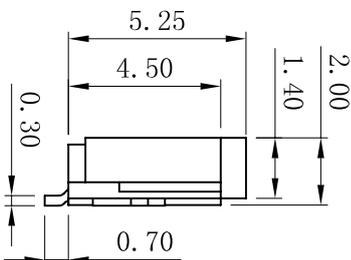

X ± 0.3	X° ± 5°	UNITS
.X ± 0.25	.X° ± 2°	MAT'L
.XX ± 0.20	.XX° ± 1°	FINISH
.XXX ± 0.10	.XXX° ± 0.5°	
Q'TY		

NAME (INTENDED USE)		PART NO. (INTENDED USE)	TITLE:
1.0mm FPC (D型) 下接板盖式			
MFG NO.:		100K11-DXR00000000	
SCALE	SHEET	REV.	
1/1	1/1	A	

**mstconn**

SHEN ZHEN DE RUI ELECTRONIC CO., LTD

1.0mm FPC (D型) 下接板盖式

