
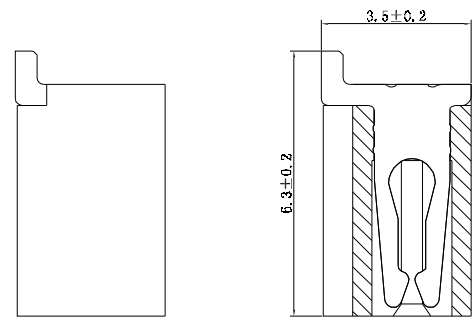
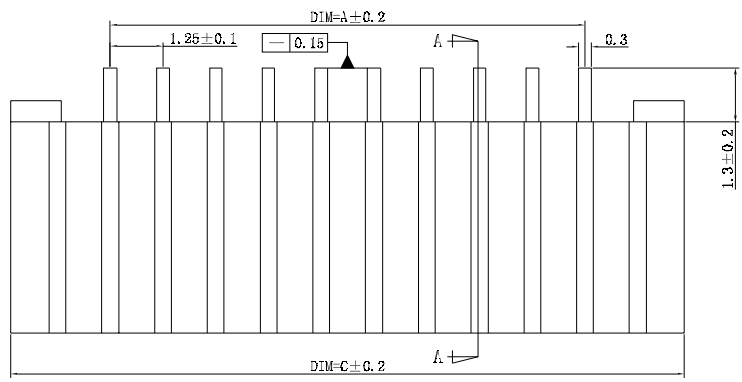
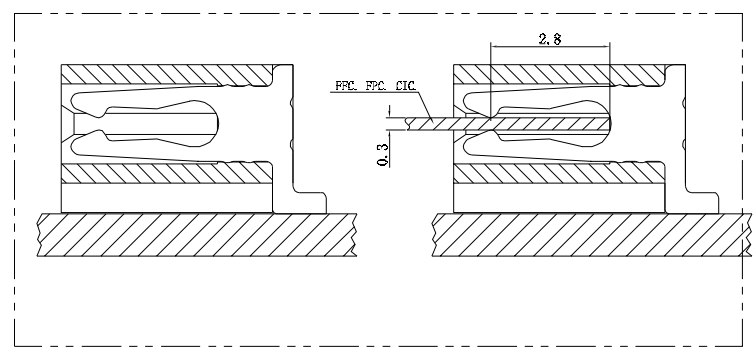




SPECIFICATIONS
 Poles:4 to 33
 Voltage rating(MAX):50V DC/AV(rms)
 Current rating:0.5A.AC.DC
 Working Temperature:-20° C to +85° C
 Withstand voltage:500VAC/minute
 Insulation resistance:≥800MΩ
 Contact resistance:≤0.04Ω
 Single Contact

HOUSING
 material:LCP,UL94V-0



X.± 0.3	X°. ± 5°
.X± 0.25	.X°. ± 2°
.XX± 0.20	.XX°. ± 1°
.XXX± 0.10	.XXX°. ± 0.5°

UNITS mm	mstconn		深圳市德瑞电子有限公司 SHENZHEN DERUI ELECTRONIC CO.,LTD.		
MAT'L					
FINISH	PART NO.(INTENDED USE)	TITLE:			
	1. 25-B-nPWB	1. 25双面接卧贴FPC连接器			
	APPD:	DWG NO.:			
Q'TY PCS	CHKD:	1. 25-B-nPWB			
	DR: HU 2016.09.28		SCALE	SHEET	REV.
			1/1	1/1	A