



15 65

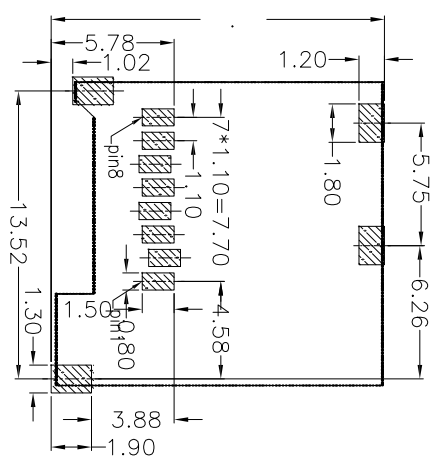


RECOMMENDED P.C.B. HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

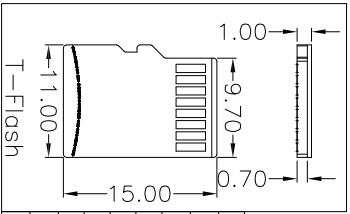




PIN NO.	NAME	TYPE	DESCRIPTION
1	DATE	I/O/PP	DATE LINE(BIT2)
2	CD/DATE	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATE	I/O/PP	DATE LINE(BIT0)
8	DATE	I/O/PP	DATE LINE(DIT1)

- NOTES:
- MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V-0 COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.
 - PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
 - MULTIMEDIA CARD COMPATIBLE

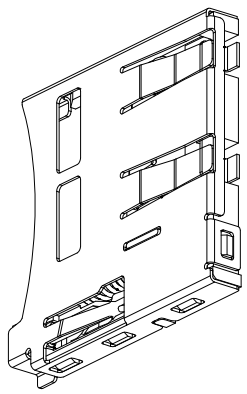

UNITS mm	MATL	FINISH	QTY	PCS
X± 0.3	X± 5'			
X± 0.25	X± 2'			
XXX± 0.20	XX± 1'			
XXX± 0.10	XXX± 0.5'			
PART NO.(INTENDED USE) TINP2-EBS1-1111		TITLE: T-FLASH内焊 PUSH B Type		
APPD: CHKD:		DWG NO.: FP-100098		
DR: HU 2016.09.28		SCALE	SHEET	REV.
		1/1	1/1	A

mstconn 深圳市德瑞电子有限公司
SHENZHEN DERUI ELECTRONIC CO., LTD.

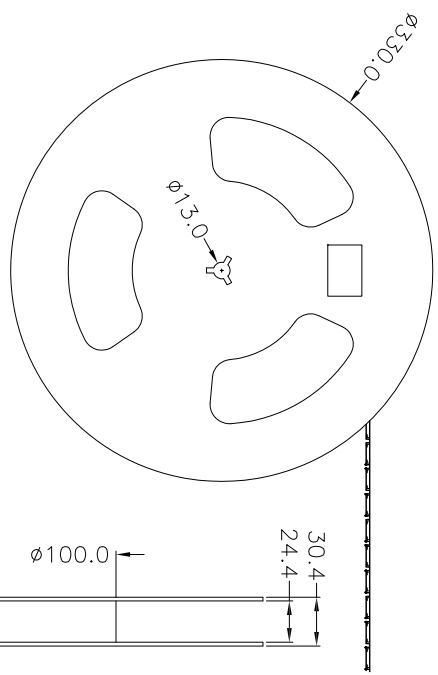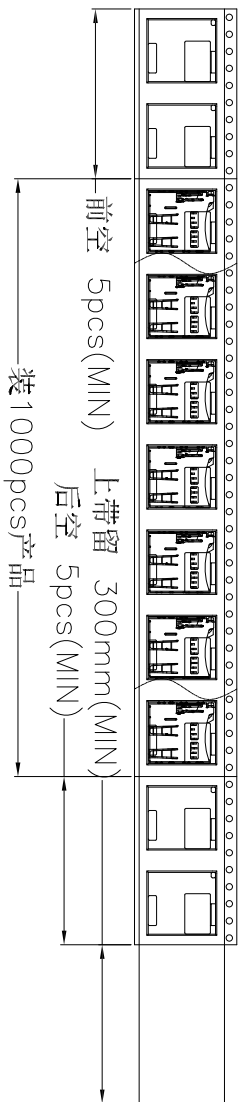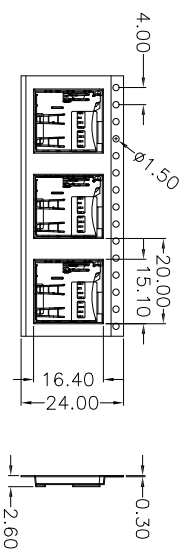

NO. 1

NO. 2

1. 材质要求:

- 1.1 纸槽的材质为B=B; 外形尺寸为33*33*38; 50M;
- 1.2 卷盘的材质为PVC; 卷盘的外形尺寸为 $\phi 330 \times 30$; 4;
- 1.3 卷带的材质为PVC; 卷带的外形尺寸为2020*24.00*2.6mm

2. 包装要求:

- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1000PCS, 再后空5PCS; 上带留300MM长度。
- 2.2 将包装好的产品从包装机上取下并包装好;
- 2.3 把累叠好的产品12盘叠放入纸箱中共计12Kset;
- 2.4 把包装好的成品打封箱, 并在纸箱外贴上标签

UNITS mm	MSTCONN		深圳市德瑞电子有限公司 SHENZHEN DERUI ELECTRONIC CO., LTD.	
MATL	PART NO.(INTENDED USE) TFNF2-ERS1-1111		TITLE: T-FLASH内焊 PUSH B Type	
FINISH	APPD: X± 0.25	QTY PCS	DWG NO.: FP-100098	
	X± 0.3		SCALE 1/1	
	X± 0.25		SHEET 1/1	
	XX± 0.20		REV. A	
	XXX± 0.10			
	X± 5'			
	X± 2'			
	XX± 1'			
	XXX± 0.5'			
	DR: HU 2016.09.28			