
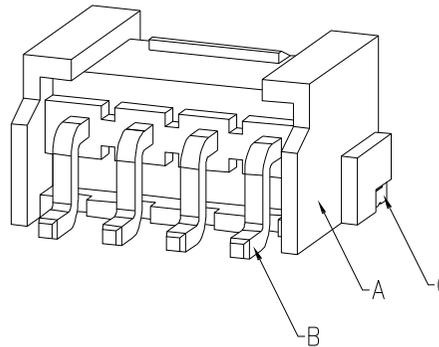



VH3.96-2PWB

VH3.96-3PWB

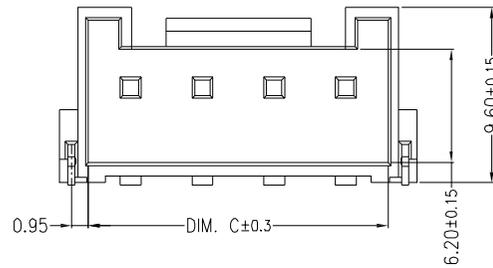

**主要技术参数 Main Specifications**


- 线数 (Poles): 02 to 16
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 7.0A AC DC
- 耐电压 (Withstand Voltage): 1500V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +105^{\circ}C$

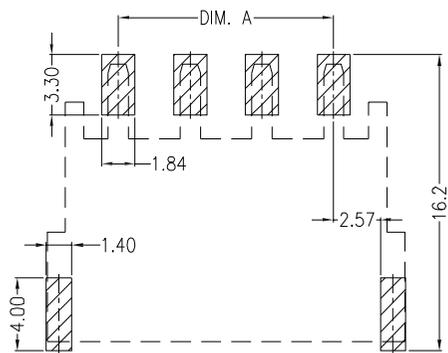

Mating PCB detail

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	3.96	11.88	8.60
03	7.92	15.84	12.56
04	11.88	19.80	16.52
05	15.84	23.76	20.48
06	19.80	27.72	24.44
07	23.76	31.68	28.40
08	27.72	35.64	32.36
09	31.68	39.60	36.32
10	35.64	43.56	40.28

C	SOLDER TAB	2PCS	Brass	Sn-plated
B	CONTACT	02~10PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA9T	UL 94V-0, COLOR:BEIGE

UNITS	深圳市德瑞电子有限公司								
mm	SHENZHEN DERUI ELECTRONIC CO.,LTD.								
MAT'L	PART NO.(INTENDED USE)	TITLE:							
	VH3.96-nPWB	VH3.96卧贴针座							
FINISH	APPD:	DWG NO.:							
		VH3.96-nPWB							
Q'TY	CHKD:	 <table border="1"> <thead> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> </thead> <tbody> <tr> <td>1/1</td> <td>1/1</td> <td>A</td> </tr> </tbody> </table>		SCALE	SHEET	REV.	1/1	1/1	A
SCALE	SHEET			REV.					
1/1	1/1	A							
PCS	DR: HU 2016.09.28								

X.± 0.3	X° ± 5°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	.XX° ± 1°
.XXX ± 0.10	.XXX° ± 0.5°